



Storage Tanks

Hot Water Storage Tanks




Glass-Lined Steel Tank with 5-Year Warranty

Twin 3/4" Magnesium Anode Rods

Factory-installed Brass Drain Valve

2" Non-CFC Foam Insulation

Steel External Jacket

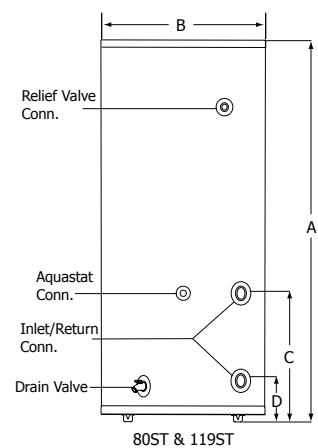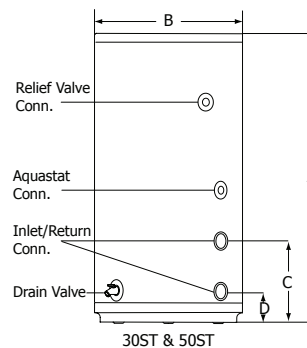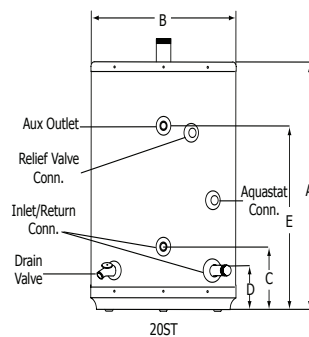

Model	Storage (gal)	T&P Relief Valve Conn.	Inlet/Return Conn.	Hot Outlet Conn.	Aquastat Conn.	Dimensions					Shipping Weight (lbs)
						A	B	C	D	E	
20ST	20	3/4"	1" / 3/4"	1"	3/4"	27 5/8"	20"	7"	4 3/8"	20"	85
30ST	30	3/4"	2" / 2"	2"	3/4"	39 1/2"	20"	11 1/4"	4 3/8"	N/A	150
50ST	50	3/4"	2" / 2"	2"	3/4"	48 1/2"	22"	11"	4 1/4"	N/A	190
80ST	80	3/4"	2" / 2"	2"	3/4"	60 1/2"	24"	22"	7"	N/A	250
119ST-2"	119	1"	2" / 2"	2"	3/4"	65 1/2"	28"	22"	7"	N/A	385
119ST-2 1/2"	119	1"	2" / 2"	2 1/2"	3/4"	65 1/2"	28"	22"	7"	N/A	385

Warning: Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z.21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use 120° F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

Pressures (all): Working Pressure, 150 psi; Testing Pressure, 300 psi



Storage Tanks



ASME Storage Tanks

Glass-Lined Steel Tank with 5-Year Warranty

Twin 1" Magnesium Anode Rods


3/4" Magnesium Anode Rods in 119ST-AH

Factory-Installed 1" T&P Valve


T&P Valve Not Available on 119ST-AH

Factory-Installed Brass Drain Valve

119ST-AH has a hand-hole port

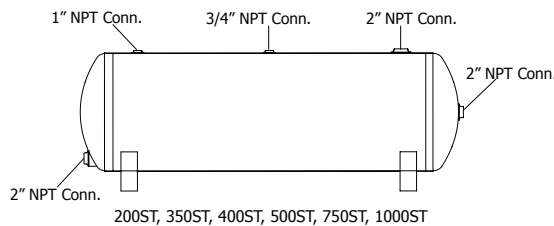

	Model	Jacket	Storage (gal)	Overall Diameter	Overall Height/Length	Shipping Weight (lbs)
Vertical	119ST-AH	Standard	119	28"	65 1/2"	385
	200ST-GA	Standard	200	32"	86"	735
	350ST-GA	Optional	350	40"	88"	1,225
	400ST-GA	Optional	400	40"	92"	1,345
	500ST-GA	Optional	500	46"	88"	1,585
Horizontal	200ST-GA-M	Not Available	200	30"	77"	735
	350ST-GA-M	Not Available	350	36"	88"	1,225
	400ST-GA-M	Not Available	400	36"	92"	1,345
	500ST-GA-M	Not Available	500	42"	88"	1,585
	750ST-GA-M	Not Available	750	48"	105"	2,375
	1000ST-GA-M	Not Available	1,000	48"	138"	3,165

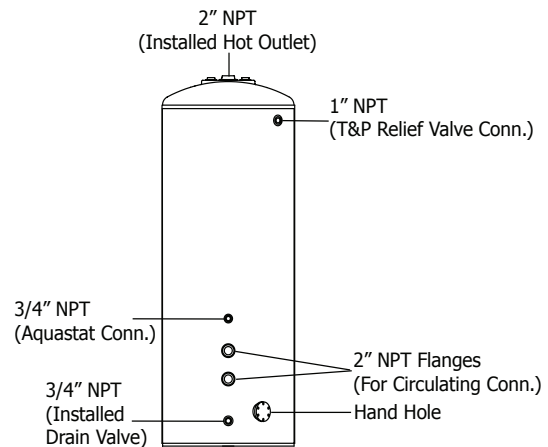

119ST, 200ST, 350ST, 400ST, 500ST

Note: Threaded leg sockets standard on horizontal models, saddles are optional.

Warning: Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z.21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.

Pressures (all): Working Pressure, 150 psi; Testing Pressure, 300 psi



www.bockwaterheaters.com
 110 South Dickinson Street, Madison, Wisconsin 53703
 Toll Free 800.794.2491 • Phone 608.257.2225 • Fax 608.257.5304



80022 Rev 9/07