


5 X 6 X 11 PF G4

PUMP MODEL			MOTOR H.P.	MOTOR FRAME SIZE	PUMP WEIGHT	POWER FRAME	BASE NO.	DIMENSIONS (INCHES)								
DISC. SIZE	SUCT. SIZE	FULL IMP.						D	X	Y	Z	CP	DD	C	HT	HL
5 X 6 X 11 PF G4			15	254 T	486	2	3	9	10	5.13	8.28	24.75	9.81	1.50	9.88	20.56
			20	256 T	544											22.44
			25	284 T	612	23.44										
			30	286 T	679	24.94										
			40	324 T	749	26.00										
			50	326 T	797	26.00										

ALL MODELS

MATERIALS OF CONSTRUCTION

DESCRIPTION	STANDARD BRONZE FITTED CONSTRUCTION	OPTIONS
CASING	CAST IRON	
CASING WEAR RINGS		BRONZE
IMPELLER	BRONZE	
POWER FRAME	CAST IRON	
POWER FRAME SHAFT	STEEL	300 SERIES S.S.
SHAFT SLEEVE	BRASS	316 S.S.
BRACKET	CAST IRON	
POWER FRAME BEARINGS	ANTI-FRICTION BALL	
LUBRICATION	GREASE	
MECHANICAL SEAL	NI-RESIST	ULTISEAL
CASING CONNECTIONS	125 ASA DRILLING	
SEAL FLUSH	INTERNAL	EXTERNAL BY-PASS
COUPLING GUARD	CLOSED ENDS	

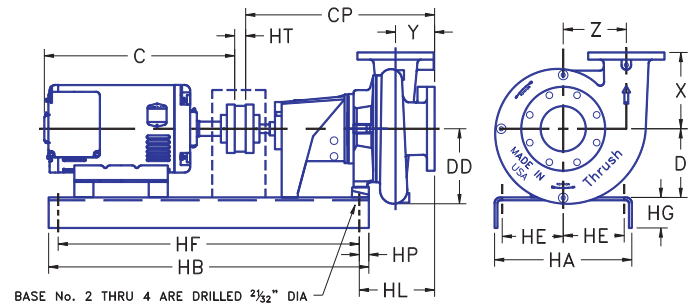

MAXIMUM OPERATING CONDITIONS

	NI RESIST (STANDARD)	SILICON CARBIDE
	CERAMIC	TUNGSTEN CARBIDE
WORKING TEMPERATURE	250°F	300°F
WORKING PRESSURE	175 PSI	175 PSI

BASE DIMENSIONS

NO	WEIGHT	HA	HB	HE	HF	HG	HP
3	104	18	38	8	35.50	4	1.25
4	115	18	42	8	39.50	4	1.25

Job Name _____
 Location _____

 Engineer _____
 Architect _____
 Sales Rep. _____
 Contractor _____

Model Number _____
 Temperature _____
 Capacity _____ GPM Head: _____ Ft.
 Liquid _____ RPM _____
 H.P. _____ B.H.P. _____
 Volts _____
 Enclosure _____